

Atlas Fix

Round

Type	Downlight
Mounting	Recessed
Material	Aluminium
Adjustability	Fixed
El. class / IP	Class III / IP20
Incl. protective glass	

Bridgelux Vero 18 LED

LED Module included

Driver to be ordered separately (see options)

Luminous flux	700mA	1050mA
2700K - Ra90:	1798lm (89lm/W)	2570lm (83lm/W)
3000K - Ra80:	2314lm (115lm/W)	3306lm (106lm/W)
3000K - Ra90:	1866lm (92lm/W)	2666lm (86lm/W)
4000K - Ra80:	2457lm (122lm/W)	3511lm (113lm/W)
Class A:	1777lm (88lm/W)	2543lm (82lm/W)

Beam angle 22° / 45° / 58°

Power 20.1W at 700mA
31.0W at 1050mA


Forward voltage 700mA: 27.3V (min.) - 29.5V (typ.) - 31.7V (max.)
1050mA: 26.6V (min.) - 28.7V (typ.) - 30.9V (max.)

Cooling Passive (no fan)
SDCM 3

5 Year **Bridgelux** Warranty on Bridgelux LEDs⁽¹⁾

⁽¹⁾Limited warranty. More information on p.210

 Ø95mm

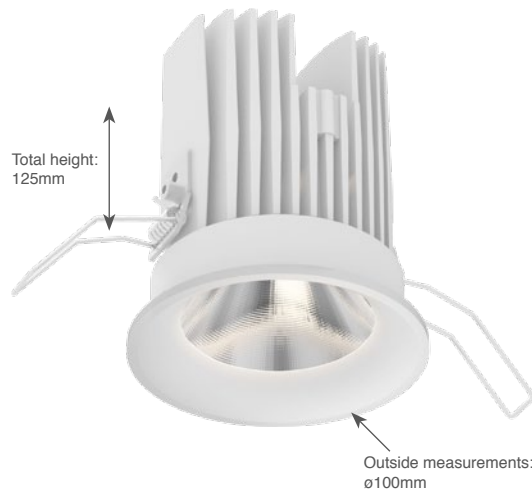


Options

Information on choosing the correct driver: see p.197

Driver "Mono 700" non dim.	490.24.36
Driver "Mono 700" Touch/DALI dim.	490.26.36
Driver "Mono 1050" non dim.	492.24.36
Driver "Mono 1050" Touch/DALI dim.	492.26.50
Driver "Duo 700" non dim.	492.24.40
Driver "Duo 700" 1-10V/Push/DALI dim.	492.26.40

Air circulation notice:

Do not topload with insulation materials





Atlas Fix

Round

CCT/CRI	700mA	1050mA	
2700K - Ra90	20.1W - 1798lm	31W - 2570lm	1030.AA.927.xx
3000K - Ra80	20.1W - 2314lm	31W - 3306lm	1030.AA.830.xx
3000K - Ra90	20.1W - 1866lm	31W - 2666lm	1030.AA.930.xx
4000K - Ra80	20.1W - 2457lm	31W - 3511lm	1030.AA.840.xx
3000K - Class A	20.1W - 1777lm	31W - 2543lm	1030.AA.A30.xx

22° Reflector: 0000.22.000.00

45° Reflector: 0000.45.000.00

58° Reflector: 0000.58.000.00

Available colors: 0000.00.000.xx

Other RAL colors on request

01



White Matt Texture
Standard

03



Black Matt Texture
Standard

07



Anthracite Matt Text. Grey Matt Texture

18



16



Gold