

# Atlas Semi-recessed

Type Downlight  
 Mounting Semi-Recessed  
 Material Aluminium  
 Adjustability Cardanic/Gimble  
 El. class / IP Class III / IP20  
 Incl. protective glass

**Bridgelux Vero 18 LED**  
 LED Module included  
 Driver included


**CCT - CRI: Luminous Flux (Efficacy)**  
 2700K - Ra90: 1798lm (89lm/W)  
 3000K - Ra80: 2314lm (115lm/W)  
 3000K - Ra90: 1866lm (92lm/W)  
 4000K - Ra80: 2457lm (122lm/W)  
 3000K - Class A: 1777lm (88lm/W)

Beam angle 22° / 45° / 58°  
 Power 20.1W (700mA)  
 Forward voltage 700mA: 27.3V (min.) - 29.5V (typ.) - 31.7V (max.)

Cooling Passive (no fan)  
 SDCM 3

5 Year **Bridgelux** Warranty on Bridgelux LEDs<sup>(1)</sup>


<sup>(1)</sup> Limited warranty. More information on p.210

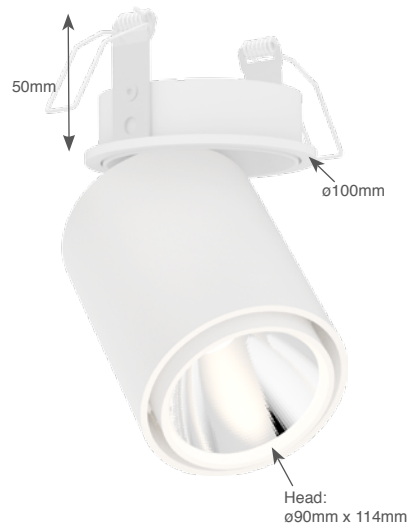

## Options

Information on choosing the correct driver: see p.197

Driver "Mono 700" non dim.	490.24.36
Driver "Mono 700" Touch/DALI dim.	490.26.36
Driver "Mono 1050" non dim.	492.24.36
Driver "Mono 1050" Touch/DALI dim.	492.26.50
Driver "Duo 700" non dim.	492.24.40
Driver "Duo 700" 1-10V/Push/DALI dim.	492.26.40

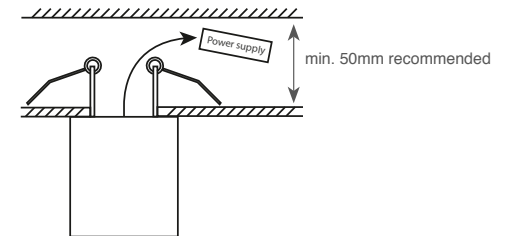



### Atlas Semi-Recessed

CCT/CRI	700mA	
2700K - Ra90	20.1W - 1798lm	1042.AA.927.xx
3000K - Ra80	20.1W - 2314lm	1042.AA.830.xx
3000K - Ra90	20.1W - 1866lm	1042.AA.930.xx
4000K - Ra80	20.1W - 2457lm	1042.AA.840.xx
3000K - Class A	20.1W - 1777lm	1042.AA.A30.xx

22° Reflector: 0000.22.000.00  
 45° Reflector: 0000.45.000.00  
 58° Reflector: 0000.58.000.00

Available colors: 0000.00.000.xx  
 Other RAL colors on request

