

NEW Tektus 45 Linear

Type	Linear
Mounting	Suspended
Material	Aluminium
Adjustable	Yes (60°/359°)
El. class / IP	Class I / IP20
CCT	2700K / 3000K / 4000K
CRI	Ra90
SDCM	3
Warranty:	see p.308

Spots: Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1072lm (132lm/W)
Luminous Flux System	2700K - Ra90: 772lm (76lm/W) 3000K - Ra90: 811lm (80lm/W) 4000K - Ra90: 822lm (81lm/W)
Beam angle	29° / 40° / 51°
LED Power	8.9W (excl. driver)
System Power	10.2W (incl. driver)

Linear Module 1800mm

	Direct (down)	Indirect (up)
Luminous Flux LED	2700K - Ra90: 4020lm (168lm/W) 3000K - Ra90: 4160lm (173lm/W) 4000K - Ra90: 4400lm (183lm/W)	4020lm (168lm/W) 4160lm (173lm/W) 4400lm (183lm/W)
Power	Direct (down): 24.0W - Indirect (up): 24.0W (excl. driver)	

Linear Module 2400mm

	Direct (down)	Indirect (up)
Luminous Flux LED	2700K - Ra90: 6030lm (168lm/W) 3000K - Ra90: 6240lm (173lm/W) 4000K - Ra90: 6600lm (183lm/W)	6030lm (168lm/W) 6240lm (173lm/W) 6600lm (183lm/W)
Power	Direct (down): 36.0W - Indirect (up): 36.0W (excl. driver)	



On request


- Recessed connecting box (more info on p.300/p.305)
- Trimless connecting box (more info on p.300/p.305)
- 3x Bridgelux Vero10 CRI Ra97


- Driver:**
- integrated in luminaire
 - included in article number and price

Connection:

- Non dim: 5-wire cable (L1, N, PE, L2, L3). Up, down and spots on separately switchable circuits with common N. If only 3 wires are available, L1, L2 and L3 can be connected together. Separate switching will not be possible.
- DALI: 5-wire cable (L, N, PE, DA1, DA2). Up, down and spots on three separate DALI channels.
- Touch dimmable ON REQUEST (L,N, PA, Touch L1, Touch L2, Touch L3) Up, down and spots on separate circuits with common N.

Data sheets and wiring guide: see website

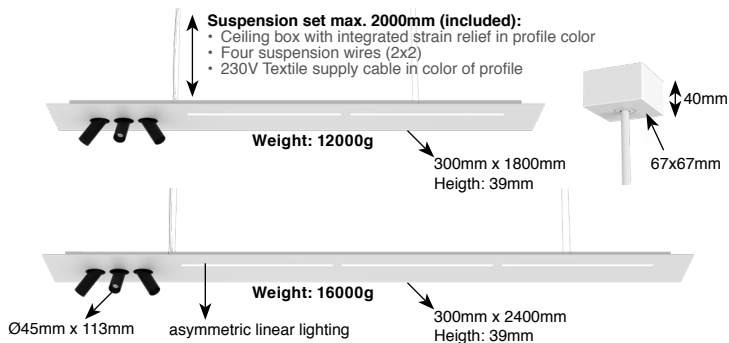

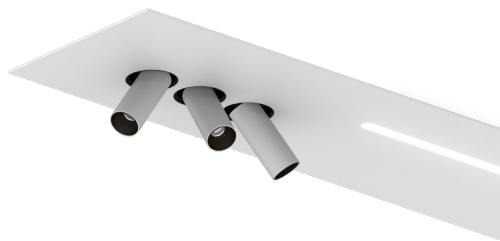

Tektus 45 Linear 1800mm **NEW!** 3-Way

PRICES INCL. DRIVERS

Linear Module Down 4400lm + 3xTektus 45 Module

2700K - Ra90 - Non dimmable 1608.AA.24.927.XX
2700K - Ra90 - DALI dim. 1608.AA.26.927.XX

3000K - Ra90 - Non dimmable 1608.AA.24.930.XX
3000K - Ra90 - DALI dim. 1608.AA.26.930.XX


4000K - Ra90 - Non dimmable 1608.AA.24.940.XX
4000K - Ra90 - DALI dim. 1608.AA.26.940.XX

Linear Module Up&Down 2x4400lm + 3xTektus 45 Module

2700K - Ra90 - Non dimmable 1601.AA.24.927.XX
2700K - Ra90 - DALI dim. 1601.AA.26.927.XX

3000K - Ra90 - Non dimmable 1601.AA.24.930.XX
3000K - Ra90 - DALI dim. 1601.AA.26.930.XX

4000K - Ra90 - Non dimmable 1601.AA.24.940.XX
4000K - Ra90 - DALI dim. 1601.AA.26.940.XX

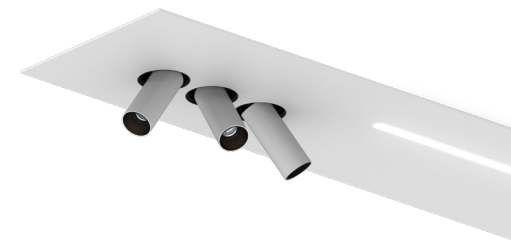

Tektus 45 Linear 2400mm **NEW!** 3-Way

PRICES INCL. DRIVERS

Linear Module Down 6600lm + 3xTektus 45 Module

2700K - Ra90 - Non dimmable 1602.AA.24.927.XX
2700K - Ra90 - DALI dim. 1602.AA.26.927.XX

3000K - Ra90 - Non dimmable 1602.AA.24.930.XX
3000K - Ra90 - DALI dim. 1602.AA.26.930.XX

4000K - Ra90 - Non dimmable 1602.AA.24.940.XX
4000K - Ra90 - DALI dim. 1602.AA.26.940.XX

Linear Module Up&Down 2x6600lm + 3xTektus 45 Module

2700K - Ra90 - Non dimmable 1603.AA.24.927.XX
2700K - Ra90 - DALI dim. 1603.AA.26.927.XX

3000K - Ra90 - Non dimmable 1603.AA.24.930.XX
3000K - Ra90 - DALI dim. 1603.AA.26.930.XX

4000K - Ra90 - Non dimmable 1603.AA.24.940.XX
4000K - Ra90 - DALI dim. 1603.AA.26.940.XX

29° Reflector: 0000.29.00.000.00
40° Reflector: 0000.40.00.000.00
51° Reflector: 0000.51.00.000.00

Available colors: 0000.00.00.000.XX
Other RAL colors on request

01



White Matt Text.
Standard

05



White + Black
Standard

12



White + Gold Matt

11



Black + Gold Matt

03



Black Matt Text.
Standard



DOXIS

LIGHTING FACTORY

