

Titan Surface Mounted


Type	Downlight
Mounting	Surface Mounted
Material	Aluminium
Adjustability	Cardanic/Gimble
El. class / IP	Class I / IP20

Bridgelux Vero 10 LED

LED Module included
Non dimmable driver included

CCT	2700K / 3000K 4000K on request
CRI	Ra80 / Ra90
Luminous flux	2700K - Ra90: 836lm (92lm/W) 3000K - Ra90: 867m (95lm/W)
angle	28° / 40°
Power	9.1W
Cooling	Passive (no fan)
SDCM	3
5 Year Bridgelux Warranty ⁽¹⁾	

⁽¹⁾Limited warranty. More information on p.268

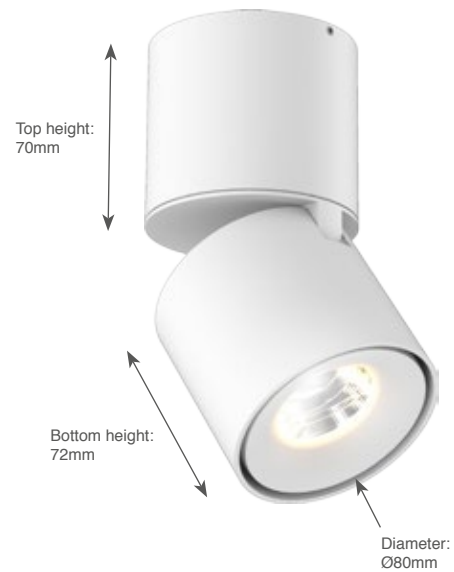

Only available in non dimmable version
For a dimmable alternative: see p.100 (Titan Base) or p.96 (Titan 200)

On Request

Other RAL colors
4000K
CRI Ra97



Titan Surface Mounted

Cone

Bridgelux LED (350mA) - 28° Reflector - non dimmable

2700K - Ra90 - 9.1W - 836lm 1204.90.2700.28.xx

3000K - Ra90 - 9.1W - 867lm 1204.90.3000.28.xx

Bridgelux LED (350mA) - 40° Reflector - non dimmable

2700K - Ra90 - 9.1W - 836lm 1204.90.2700.40.xx

3000K - Ra90 - 9.1W - 867lm 1204.90.3000.40.xx



Titan Surface Mounted

Organic

Bridgelux LED (350mA) - 28° Reflector - non dimmable

2700K - Ra90 - 9.1W - 836lm 1205.90.2700.28.xx

3000K - Ra90 - 9.1W - 867lm 1205.90.3000.28.xx

Bridgelux LED (350mA) - 40° Reflector - non dimmable

2700K - Ra90 - 9.1W - 836lm 1205.90.2700.40.xx

3000K - Ra90 - 9.1W - 867lm 1205.90.3000.40.xx



Titan Surface Mounted

Anti-glare

Bridgelux LED (350mA) - 28° Reflector - non dimmable

2700K - Ra90 - 9.1W - 836lm 1206.90.2700.28.xx

3000K - Ra90 - 9.1W - 867lm 1206.90.3000.28.xx

Bridgelux LED (350mA) - 40° Reflector - non dimmable

2700K - Ra90 - 9.1W - 836lm 1206.90.2700.40.xx

3000K - Ra90 - 9.1W - 867lm 1206.90.3000.40.xx

Available colors: 0000.00.0000.00.xx
Other RAL colors on request



01 White Matt Texture Standard



03 Black Matt texture Standard



05 White + Black Standard



07 Anthracite Matt Text.



18 Grey Matt Texture



22 White + Chrome



21 Black + Chrome



11 Black + Gold



16 Gold